

INSTALLATION & CARE

2017-UP FORD F250 PROJECTOR LED HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	1/4" Extension	10 mm socket	1/2" mm socket
			
Trim Pad Remover	12" Flathead Screwdriver		
			

PRODUCT NUMBER


2LHP-F25017-SQ-RS
 2LHP-F25017JM-SQ-RS
 2LHP-F25017BK-SQ-RS
 2LHP-F25017G-SQ-RS

LET'S START THE INSTALLATION



STEP 1

Remove the 13 plastic fastener clips

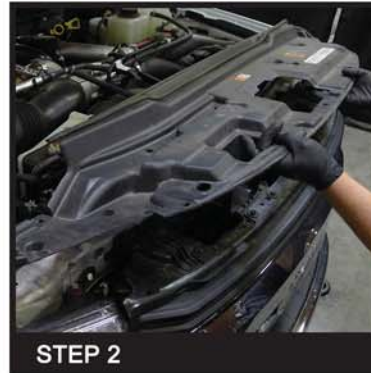

STEP 2

Remove the plastic radiator cover



STEP 3

Remove the eight 10mm front grille mounting bolts at the top



STEP 4

Gently pull out the top and the side of the front grille to reach the bottom lock clip



STEP 5A

Use a flathead screwdriver to push down to release the four clips at the bottom of the front grille



STEP 5B

Use a flathead screwdriver to push down to release the four clips at the bottom of the front grille



STEP 5C

Use a flathead screwdriver to push down to release the four clips at the bottom of the front grille



STEP 6

Remove the front grille



STEP 7

Remove the 10mm headlight mounting bolt at the bottom of the headlight



STEP 8

Remove the two 10mm headlight mounting bolts at the side of the grille



STEP 9

Remove the 10mm headlight mounting bolt at the top of the headlight



STEP 10

Unseat the factory headlight housing



STEP 11

Disconnect the headlight harness and remove the factory headlight housing



STEP 12

Reconnect the headlight harness to the new headlight housing



STEP 13

Seat the new headlight assembly in place



STEP 14

Reinstall the 10mm headlight mounting bolt at the bottom of the headlight



STEP 15

Reinstall the 10mm headlight mounting bolt at the top of the headlight



STEP 16

Reinstall the two 10mm headlight mounting bolts at the side of the grille



STEP 17

Please repeat the steps from 07 to 16 for the opposite side



STEP 18

Reinstall the front grille



STEP 19

Reinstall the eight 10mm front grille mounting bolts at the top



STEP 20

Reinstall the plastic radiator cover



STEP 21

Reinstall the 13 plastic fastener clips

