

# INSTALLATION & CARE

## 2009-2014 FORD F150 LED TAIL LIGHT INSTALLATION INSTRUCTION

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.


### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	8 mm Socket	Plastic Pry Bar
		

### PRODUCT NUMBER


LT-F15009CLED-G2-TM  
 LT-F15009GLED-G2-TM  
 LT-F15009JMLED-G2-TM  
 LT-F15009BBLED-G2-TM  
 LT-F15009RLED-G2-TM

### LET'S START THE INSTALLATION

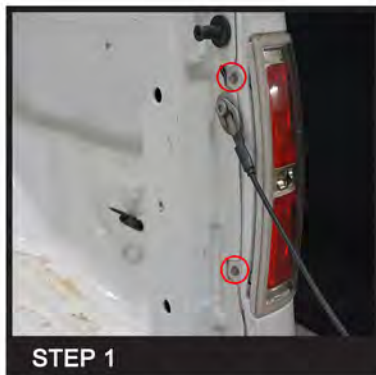


**STEP 1**

Remove the two 8mm bolts

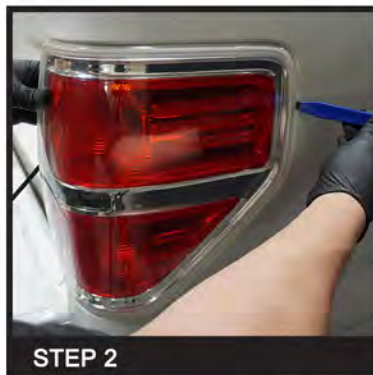

**STEP 2**

Unseat the factory tail light housing

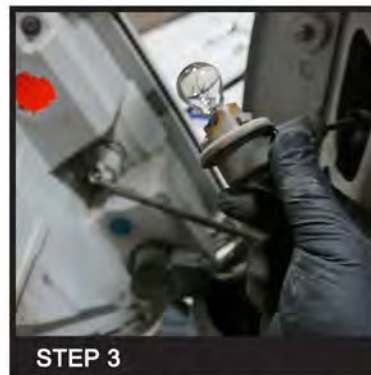


**STEP 3**

Disconnect all of the light bulb sockets



**STEP 4**

Remove the factory tail light housing

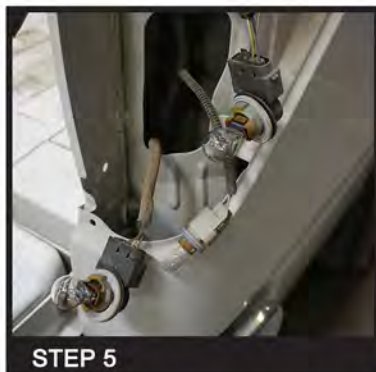


**STEP 5**

Remove the two brake light bulbs from the light sockets



**STEP 6**

Use alcohol to clean the metal surface to apply the resistor

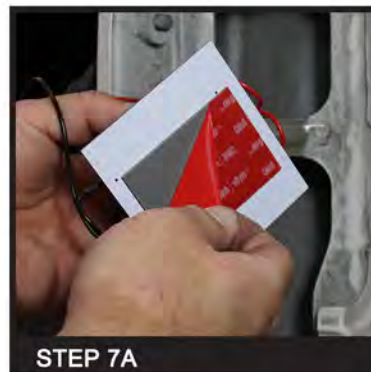

**STEP 7A**


Set the new tail light resistor on the metal area



**STEP 7B**

Set the new tail light resistor on the metal area



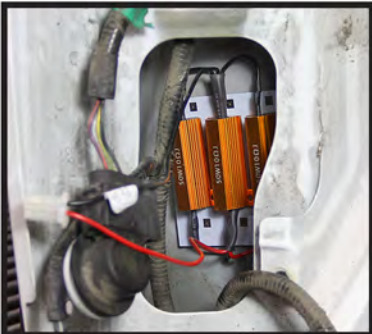

**STEP 7C**

Set the new tail light resistor on the metal area



**STEP 8**

Insert the light plug to the light socket, (+) to (+) and (-) to (-)



**STEP 9**

Connect the resistor connector



**STEP 10**

Seat the new tail light assembly in place



**STEP 11**

Reinstall the two 8mm bolts



**STEP 12**

Please repeat the steps from 1 to 11 for the opposite side



**STEP 13**

Close tailgate to complete the installation

