

INSTALLATION & CARE

2007-2013 GMC SIERRA LED LIGHT BAR PROJECTOR HEADLIGHT INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	7 mm socket	10 mm socket	Trim Pad Remover
			
1/4" Extension			
			

PRODUCT NUMBER

2LHP-SIE07-G2-TM
2LHP-SIE07JM-G2-TM
2LHP-SIE07BK-G2-TM
2LHP-SIE07G-G2-TM




LET'S START THE INSTALLATION



STEP 1

Remove the eight plastic clips

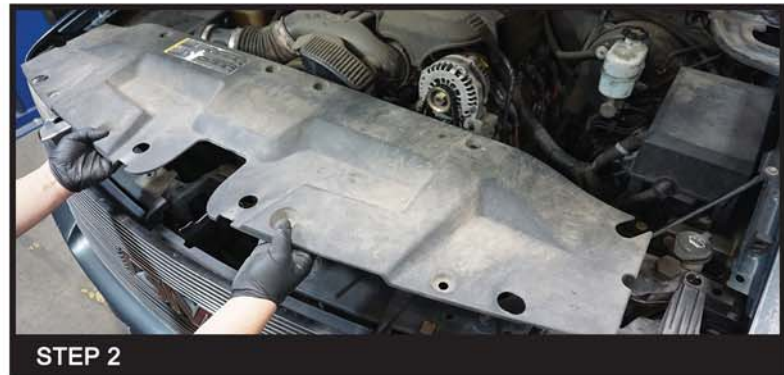

STEP 2

Remove the plastic radiator cover



STEP 3

Remove the four 10mm bolts



STEP 4

Remove the two 7mm bolts at the side of the front bumper



STEP 5

Gently pull out the side of the front bumper



STEP 6

Remove the 10mm headlight mounting bolt at the bottom of the headlight




STEP 7

Remove the two 10mm headlight mounting bolts at the top



STEP 8

Remove the factory headlight housing

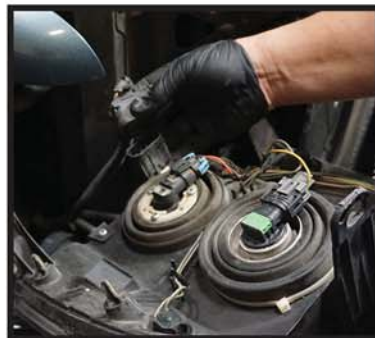

STEP 9

Disconnect the headlight harness



STEP 10

Remove the headlight harness from the factory headlight



STEP 11

Remove the T10 parking light bulb from the headlight harness



STEP 12

Connect the T10 parking light plug from the new headlight housing, then install the headlight harness to the headlight housing



STEP 13

Connect the headlight harness



STEP 14

Install the new headlight assembly in place




STEP 15

Reinstall the two 10mm headlight mounting bolts at the top



STEP 16

Reinstall the 10mm headlight mounting bolt at the bottom of the headlights

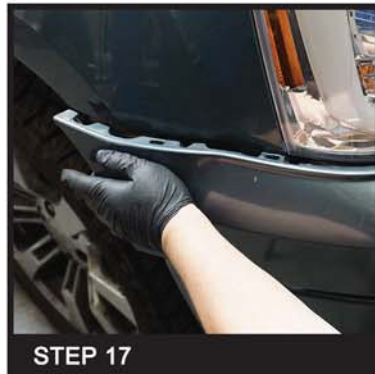

STEP 17

Reinstall the front bumper



STEP 18

Reinstall the two 7mm bolts



STEP 19

Please repeat the steps from 4 to 18 for the opposite side



STEP 20

Reinstall the four 10mm bolts



STEP 21

Reinstall the plastic radiator cover



STEP 22

Reinstall the eight plastic clips



STEP 23

Close the hood to complete installation

INSTALLATION & CARE

2007-2013 GMC SIERRA LED LIGHT BAR PROJECTOR HEADLIGHT INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2007-2013 GMC SIERRA LED LIGHT BAR PROJECTOR HEADLIGHT INSTALLATION INSTRUCTIONS

