

INSTALLATION & CARE

2000-2006 GMC YUKON DENALI HEADLIGHT BUMPER LIGHT INSTALLATION INSTRUCTION

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

Pliers	Flathead Screwdriver		
			

PRODUCT NUMBER

2LHP-DEN00-G2-TM	LB-GMC99-TM
2LHP-DEN00JM-G2-TM	LB-GMC99JM-TM
2LHP-DEN00G-G2-TM	LB-GMC99G-TM
2LHP-DEN00BK-G2-TM	LB-GMC99BK-TM



LET'S START THE INSTALLATION



STEP 1

Turn to remove the two headlight support pins




STEP 2

Uninstall the factory headlight housing



STEP 3

Disconnect the headlight harness

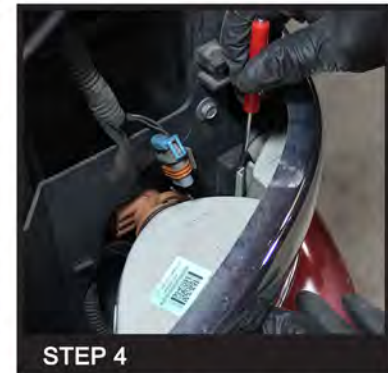


STEP 4

Use a flat tip pocket screwdriver to unhold the factory parking light housing



STEP 5

Unseat the factory parking light housing

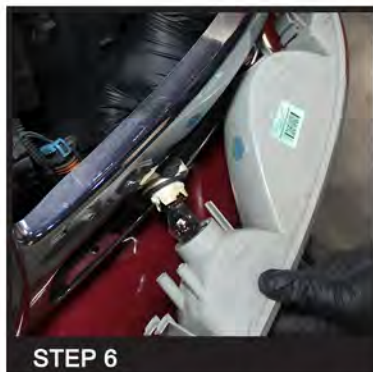


STEP 6

Remove the light sockets from the factory parking light housing, and then remove the factory parking light housing



STEP 7A

Connect the two wires onto the amber signal bulb socket to get power for the LED light bar, the middle wire on the socket for (+) and the black wire for (-)

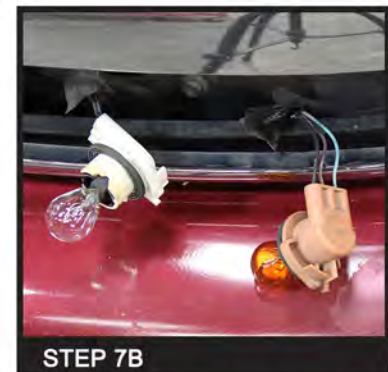

STEP 7B

Connect the two wires onto the amber signal bulbs socket to get power for the LED light bar, the middle wire on the socket for (+) and the black wire for (-)



STEP 7C

Connect the two wires onto the amber signal bulbs socket to get power for the LED light bar, the middle wire on the socket for (+) and the black wire for (-)



STEP 8

Reinstall the light sockets to the new parking light housing



STEP 9

Seat the new parking light assembly in place



STEP 10

Connect the LED wire connector and the headlight harness




STEP 11

Seat the new headlight assembly in place



STEP 12

Reinstall the two headlight support pins

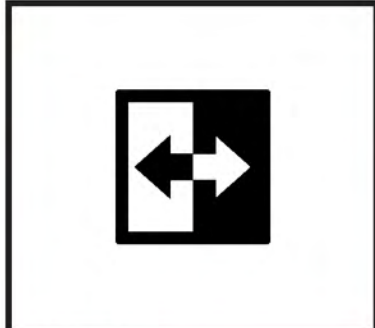

STEP 13

Please repeat the steps from 1 to 12 for the opposite side



STEP 14

Close the hood to complete the installation




INSTALLATION & CARE

2000-2006 GMC YUKON DENALI HEADLIGHT BUMPER LIGHT INSTALLATION INSTRUCTION

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2000-2006 GMC YUKON DENALI HEADLIGHT BUMPER LIGHT INSTALLATION INSTRUCTION

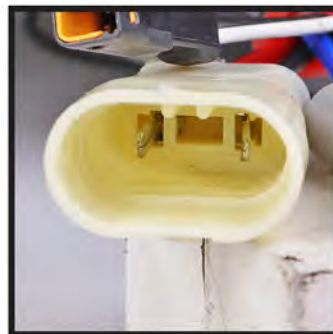

 **LOW BEAM ADJUSTER**

 **HIGH BEAM ADJUSTER**