

# Installation & CARE

## 2010-2011 KIA SOUL PROJECTOR HEADLIGHTS INSTALLATION

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED


¼" Ratchet	Plastic pry bar	10 mm socket	Phillips Screwdriver
			

### PRODUCT NUMBER

2LHP-SOU10-TM  
2LHP-SOU10JM-TM  
2LHP-SOU10G-TM



### LET'S START THE INSTALLATIONS

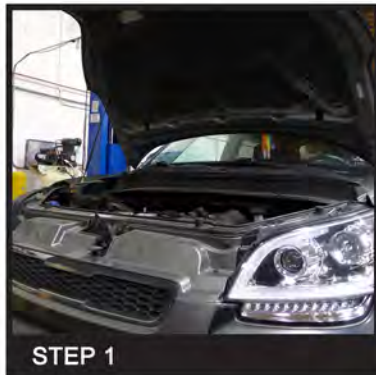

**STEP 1**

Lift the hood



**STEP 2**

Remove (2) 10mm top bumper bolts



**STEP 3**

Remove (4) bumper fasteners



**STEP 4**

Remove (1) phillips head screw from upper inner wheel well




**STEP 5**

Remove (4) center bumper fasteners




**STEP 6**

Remove wheel well bumper fasteners (2 on each side)

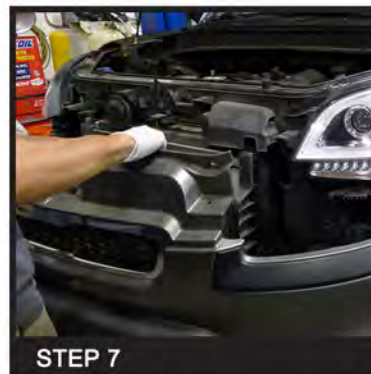

**STEP 7**

Remove bumper

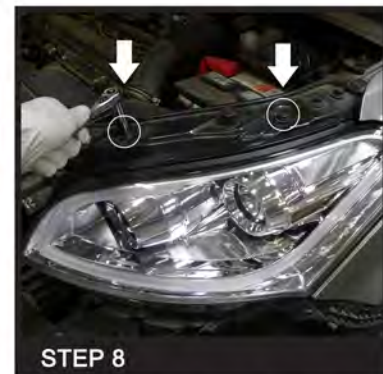

**STEP 8**

Remove (2) 10mm upper headlight bolts



**STEP 9**

Disconnect headlight harness



**STEP 10**

Remove headlight housing



**STEP 11**

Connect headlight harness and Install new headlight housing



**STEP 12**

Secure (2) 10mm upper headlight bolts



**STEP 13**

Please repeat the steps from 8 to 12 for the opposite side




**STEP 14**

Reinstall the bumper



**STEP 15**

Reinstall (4) upper bumper fasteners

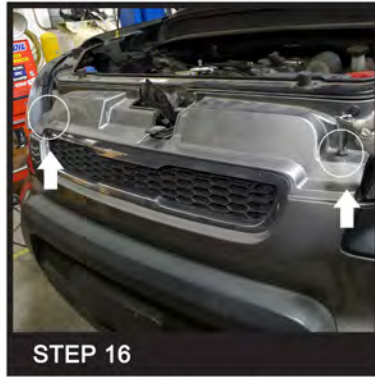


**STEP 16**

Reinstall (2) 10mm upper bumper bolts




**STEP 17**

Reinstall wheel well guard upper bumper screw

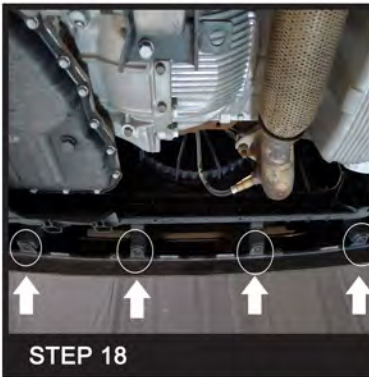

**STEP 18**

Reinstall (4) lower bumper fasteners

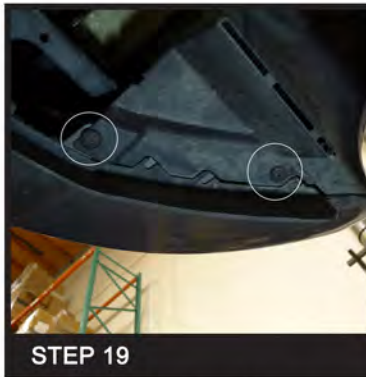

**STEP 19**

Reinstall wheel well guard lower bumper fasteners (two on each side)



**STEP 20**

Close the hood



**STEP 21**

The installation is now complete

## 2010-2011 KIA SOUL PROJECTOR HEADLIGHTS INSTALLATION

### BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### BACK VIEW

## High/Low Beam Adjustment Screws

