

SPEC-D *Tuning*

1999-2004 VOLKSWAGEN JETTA PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS



- *If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- *Please wear protection before you work on your vehicle.
- *An assistant is helpful when removing the front bumper.
- *Please be careful while working with the bumper or body part to avoid scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

3/8" Drive Ratchet	6" Long 3/8" Drive Extension
1/4" Drive Ratchet	6" Long 1/4" Drive Extension
T30 Socket	Phillips Screwdriver
T25 Socket	Flathead Screwdriver

Product Part Numbers:

LHP-JET99JM-8-TM

LHP-JET99-8-TM



VOLKSWAGEN JETTA HEADLIGHTS INSTALLATION INSTRUCTIONS



- *If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.
- *Please wear protection before you work on your vehicle.
- *An assistant is helpful when removing the front bumper.
- *Please be careful while working with the bumper or body part to avoid scratching.
- *Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. Open the hood



2. Remove the plastic shielding from the top of the headlight




3. Pull up the grill



4. Pull up the grille on the vehicle



5. After you pull the grille up, it should look the same as the picture shown above

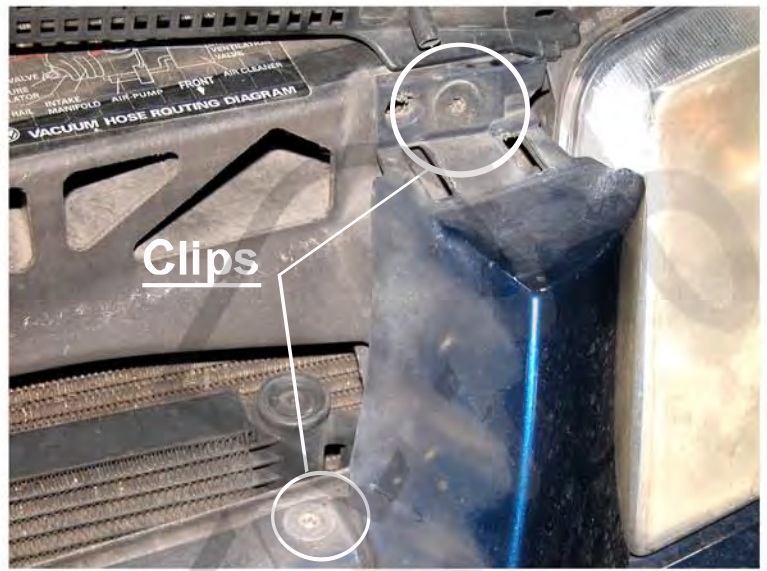

6. There are two clips that needs to be removed



7. Remove the top clip



8. Then remove the bottom clip



9. There are two bolts underneath the fender that needs to be removed also



10. Remove the bolts from the fog light opening



11. Gently pull out the bumper slightly, just enough to see the bottom of the headlight



12. After you pull the bumper slightly, it should look the same as the picture shown above



13. Use a flat tip screwdriver to disconnect the connector from headlight and vehicle



14. Remove the two bolts on top of the headlight



15. Gently pull out the headlight



16. After removing the headlight, it should look the same as the picture shown above



17. Connect the connector with thr headlight
please see the "Halo and L.E.D. installation instructions"
If your headlights don't have HALO or L.E.D. You can skip the
installation instructions.



18. Gently install the projector headlight to its original spot
and install the bolts to fasten the headlight




19. Install the bolts below the headlight between the bumper



20. Gently put the bumper to its original position



21. Install the bolts to the fog light opening

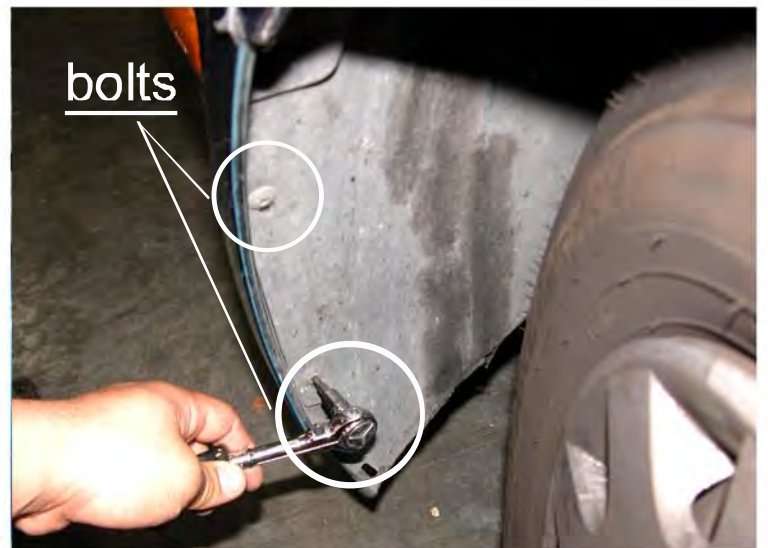

22. Install the bolts underneath the fender



23. Install the bottom clip on top of the front bumper



24. Install the top clip



25. There are two clips that need to be installed



26. Put the grille back



27. Put the plastic shielding back on the top of the headlight
(Please repeat the picture order from 1 to 27 for the opposite side)



28. The installation is now complete